

# 8G40-DEKA

## SPECIFICATIONS

<b>Nominal Voltage (V)</b>	12V
<b>Capacity at C/100</b>	48Ah
<b>Capacity at C/20</b>	40Ah
<b>Weight</b>	32 lbs. (14.5 kg)
<b>Plate Alloy</b>	Lead Calcium
<b>Posts</b>	Forged Terminals & Bushings
<b>Container/Cover</b>	Polypropylene
<b>Operating Temperature Range</b>	-76°F (-60°C) - 140°F (60°C)
<b>Charge Voltage @ 68°F (20°C)</b>	
<b>Cycle</b>	2.30 - 2.35VPC
<b>Float</b>	2.25 - 2.30VPC
<b>Vent</b>	Self-sealing
<b>Electrolyte</b>	Sulfuric acid thixotropic gel
<b>Terminal</b>	C (Insert w/ 1/4" - 20 round hole)



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

Distributed by:


Valve-Regulated, Gelled-Electrolyte Battery



## DIMENSIONS

<b>Length (mm)</b>	<b>7.76 (197 mm)</b>
<b>Width (mm)</b>	<b>6.62 (168 mm)</b>
<b>Height (mm)</b>	<b>6.87 (174 mm)</b>

**Gel Cycle Life vs Depth of Discharge at +25°C (77°F)  
Based on BCI 2-hour Capacity**

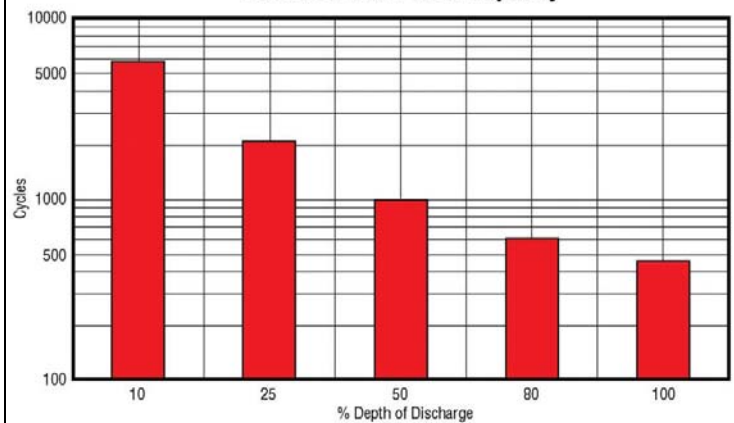

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

