




Flexible Solar Chargers

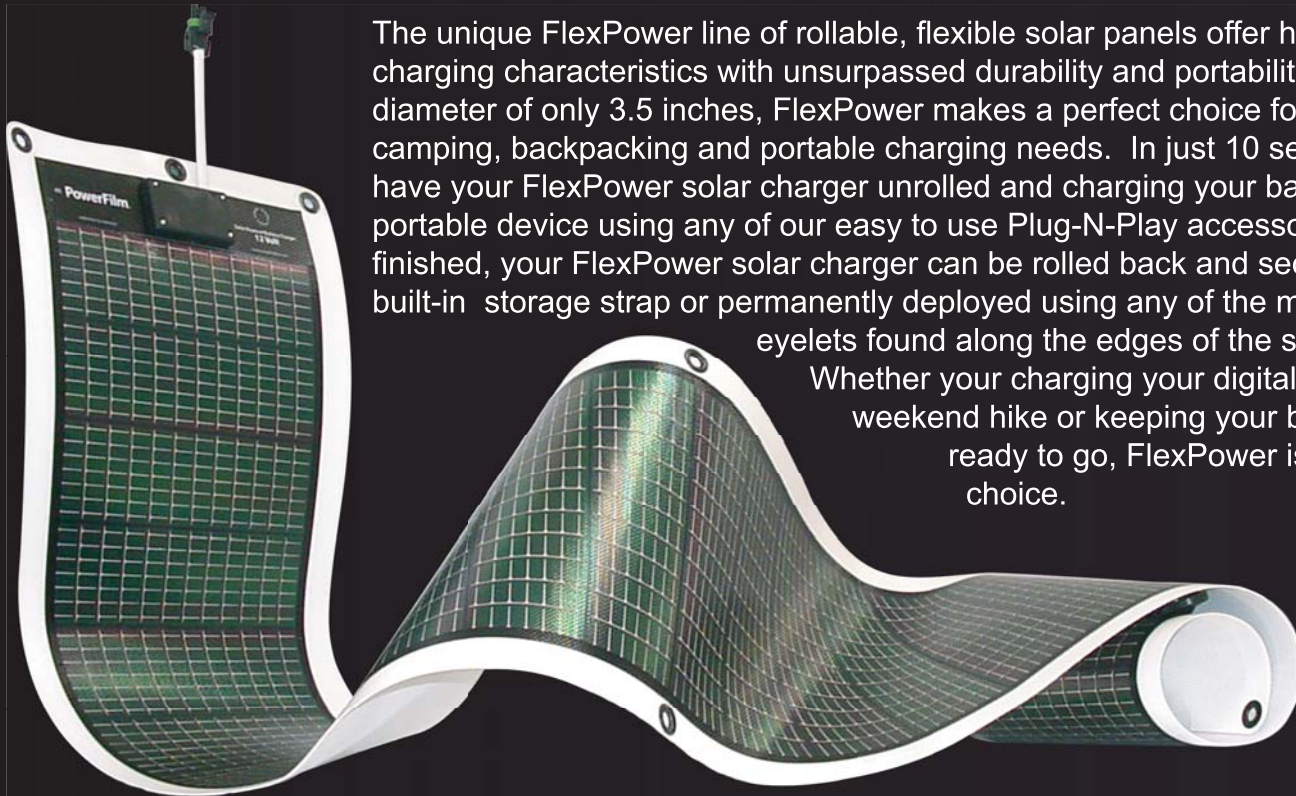


The unique FlexPower line of rollable, flexible solar panels offer high power charging characteristics with unsurpassed durability and portability. With a rolled diameter of only 3.5 inches, FlexPower makes a perfect choice for all your boating, camping, backpacking and portable charging needs. In just 10 seconds you can have your FlexPower solar charger unrolled and charging your battery or favorite portable device using any of our easy to use Plug-N-Play accessories. When finished, your FlexPower solar charger can be rolled back and secured using the built-in storage strap or permanently deployed using any of the multiple metal eyelets found along the edges of the solar panel.

Whether your charging your digital camera on a weekend hike or keeping your boat batteries ready to go, FlexPower is the brand of choice.

Chargers Include:

- 15' marine-grade output wire
- Marine-grade output connectors
- Integrated blocking diode
- Rollable/Non-glass construction
- Wrap around storage fastener
- Multiple mounting eyelets
- Plug-N-Play connectors for ease of installation
- Full line of Plug-N-Play accessories
- 3 year warranty

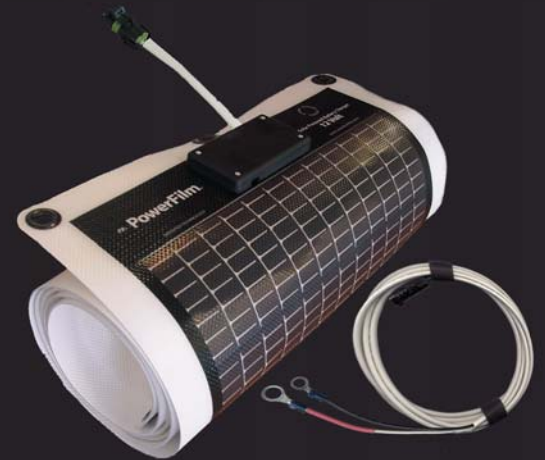


Standard Kit

Available From:



Technical Specifications

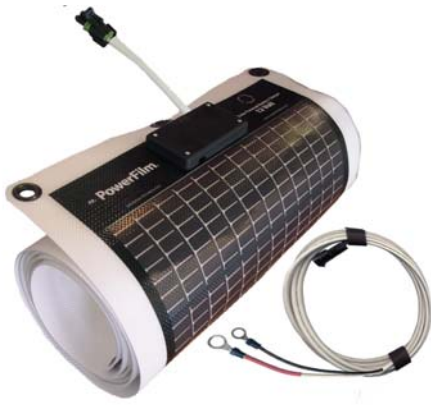

	Operating Voltage (V)	Operating Current (Amps)	Weight (lbs./kg)	Rolled Dimensions (in/mm)	Unrolled Dimensions (in/mm)
FP-5	15.4	.30	.6 .29	11.5x4x3.75 292x101x92	11.5 x 21 292 x 531
FP-10	15.4	.60	1.0 .46	11.5x4.25x4.25 292x108x108	11.5 x 38 292 x 972
FP-15	15.4	1.2	1.9 .88	12x4.25x4.5 305x108x114	12 x 73 305 x 1858

Daily Run Times (hours)

Charge or Direct Power 12 V Systems	FlexPower FP-5	FlexPower FP-10	FlexPower FP-15
12V Fish Finder (.83 Amps)	1.8	3.6	7.2
12V GPS (.42 Amps)	3.6	7.1	14.3
12V Bilge Pump (3 Amps)	.5	1	2
Outdoor Lighting (.8 Amps)	1.9	3.8	7.5
14" Color Television (3.33 Amps)	0.5	0.9	1.8
Search Light (8.3 Amps)	0.2	0.4	0.7
CB Radio (.42 Amps)	3.6	7.1	14.3
Charge Wireless Electronics			
Cell Phone (.5 Amps)	3	6	12
Satellite Phone (.5 amps)	3	6	12
AM/FM Radio (.4 Amps)	3.8	7.5	15
Laptop (2.5 Amps)	0.6	1.2	2.4
PDA's (.5 Amps)	3	6	12

Accessories



FP-RA-1: Charge a vehicle's battery directly through the cigarette lighter.



FP-RA-4: Fast charge 2 or 4 AA, AAA, C or D (NiCad or NiMH) batteries and 1 or 2 9V batteries at the same time.



FP-RA-7: 15 foot extension chord.



FP-RA-2: Directly charge any wireless electronics device with its 12V cigarette lighter adapter.



FP-RA-5: Deluxe universal battery charger. Designed to accommodate a wide variety of batteries for cell phones, camcorders, two-way radios or laptops.



FP-RA-8: 15 foot extension chord with alligator clips.



FP-RA-3: Trickle charge up to 4 AA/AAA batteries at a time.



FP-RA-6: Connects 2 FlexPower chargers in parallel for increased current output (amps).



FP-RA-9: 4.5 Amp, 12V charge controller that regulates battery charge.