


GC15DT-DEKA

SPECIFICATIONS

Nominal Voltage (V)	6V
Capacity at C/100	243 Ah
Capacity at C/20	230 Ah
Capacity at C/6	181 Ah
Weight	63 lbs. (28.6 kg)
Container/Cover	Polypropylene
Operating Temperature Range	60°F (16°C) - 120°F (49°C)
Charge Voltage @ 68°F (20°C)	
Cycle	1.15 - 1.17 VPC
Float	1.20 - 1.22 VPC
Vent	Individual quarter—turn bayonet vent cap
Self Discharge	1% per week
Terminal	U (SAE/STUD)



Made in the U.S.A. by East Penn Manufacturing Co., Inc.

Distributed by:


Flooded Battery, Wet type



DIMENSIONS

Length (mm)	10.25 (260 mm)
Width (mm)	7.13 (181 mm)
Height (mm)	10.88 (276 mm)

BCI- EV 2 Hour Test on Golf Car Batteries GC-15

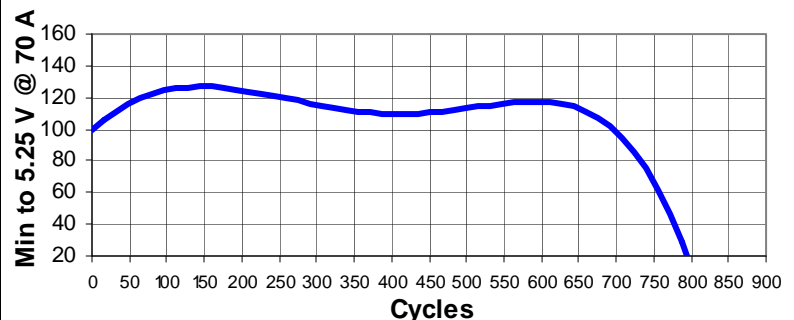

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

