


Are you emergency power ready?

The Powertron® Tap Box makes your facility “emergency power ready,” avoiding the clumsy, costly and time consuming process of connecting temporary power. The installation of a Powertron® Tap Box allows you to:



- Establish a quick connection during power outages and load banking
- Predetermine load requirements, generator sizing and cable lengths
- Identify proper location for the temporary generator; minimizing disruption
- Improve safety and security by eliminating exposed cables and clutter

**NEMA 3R
OUTDOOR RATED**

Technical Data


| | |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Rating | 800 Amps, 3 Phase, 4 Pole, 5 Wire, 208Y/120 VAC, 240/120 VAC, 480Y/277 VAC, or 600/347 VAC |
| Enclosure | Wall mount, mild steel or stainless steel, weather tight enclosure by Hoffman® |
| Dimensions | 42.0"H x 32.0"W x 20"D |
| Incoming Utility Power Connection | Tin plated copper bus bar |
| Completed Assembly Safety Agency Approved | cULus Listed 1008 Control # 47HY Product ID: Enclosed Power Inlet cULus Listed 1773 Control # XCKT Product ID: Enclosed Power Outlet |
| UL Verified, A061453 | Trapped cable door prevents cable disconnection by unauthorized personnel. |

Key Features and Benefits

| | |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Security and Safety | Powertron's® Trapped Cable Door upholds a UL Verified Mark which was tested to ensure added security and safety while the generator cables are connected to the tap box. Additional features such as the KIRK® Key field assembled kit and lockable door also provides greater security and safety. |
| Cold Weather Startup | GFCI receptacle allows power to be provided safely to a generator block heater and battery charger for cold weather operation. |
| Automatic Startup | During inclement weather conditions or during a load bank test, the Start/Stop terminals enable your mobile generator to standby to automatically restore power to your facility when using an Automatic Transfer Switch. |
| Backup Power Contingency Plan | Provides your business the ability to have an emergency back power contingency plan into your facility. |
| Harsh Weather Protection | Engineered and tested to withstand the toughest conditions. Features of the enclosure such as the trapped cable door adds protection during inclement weather conditions. |
| Uncompromising Quality | Engineered and assembled with the highest quality components from the most respected and leading manufacturers in their industry. |

UL Listed & Registered Quality Components from



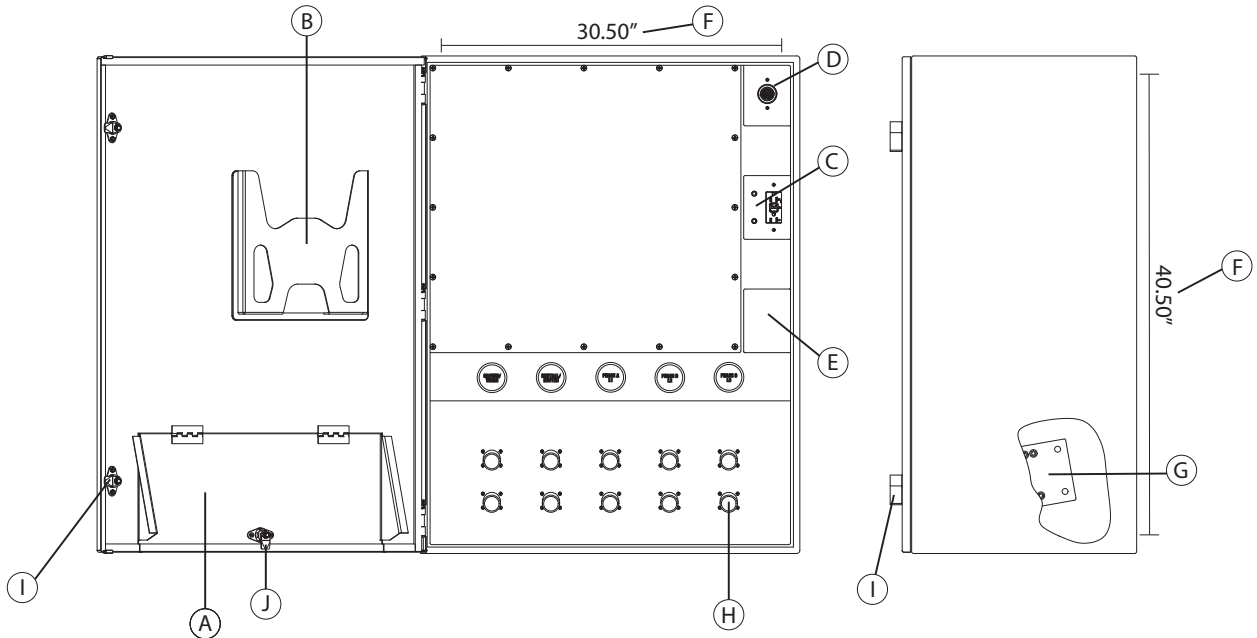

Enclosure Specifications

| Type | Height | Width | Depth | Material | Color/Finish | Unit Weight | Shipping Weight |
|---------|--------|-------|-------|-----------------|-------------------------|-------------|-----------------|
| NEMA 3R | 42.0" | 32.0" | 20" | Mild Steel | Powder Coat Light Ivory | 200 | 250 |
| | | | | Stainless Steel | Clear Brushed Finish | 175 | 225 |

KIRK® KEY TRAPPED DOOR LOCK

FIELD ASSEMBLED KIT (Not Included)

| Part Number | Description | Kit Includes |
|--------------------|------------------------|------------------------------------------|
| TBQC-KIRKF9831-001 | Single Barrell Opening | Mounting Bracket, Hardware & Instuctions |
| TBQC-KIRKF9831-002 | Double Barrell Opening | Mounting Bracket, Hardware & Instuctions |

PHASE ROTATION MONITOR

FIELD ASSEMBLED KIT (Not Included)

| Part Number | Description | Kit Includes |
|------------------|----------------------------------------------------------------|------------------------------------------|
| TBCQ-MONITOR-KT1 | For 240V to 600V Tap Boxes Only <i>(208V not available)</i> | Relay Module, Cable Leads & Instructions |

CABLE CONNECTORS

FIELD ASSEMBLED KIT (Not Included)

| Lug Type | Available Cable Sizes | Kit Includes |
|-----------------|------------------------|---------------------|
| Mechanical Lug | 6 STR to 600 Kcmil | (5) Lugs & Hardware |
| Compression Lug | 250 Kcmil to 600 Kcmil | (5) Lugs & Hardware |

Standard Components

| | |
|---|---------------------------------------------------------------------------------------------------------------------------------------|
| A | Trapped Cable Door Patented #US D771,580 S UL Verified: A061453 |
| B | Owner's Manual Holder |
| C | Remote Start/Stop Terminals & GFCI 20 Amp Receptacle |
| D | 30 Amp Twist-Lock Receptacle |
| E | Cover plate shall only be removed when installing Powertron® Phase Rotation Monitor |
| F | Mounting Hole Pattern – (4X) 0.50" dia. |
| G | (5X) Copper Bus Bar, Tin Plated, (1) mounting hole 0.50" dia. <i>(See Mechanical Lug Kit for building wire connection options)</i> |
| H | Series 16, 400 Amp, 600 VAC, Single Pole Cam-Lock Receptacle |
| I | Key Lock Handle |
| J | Quarter Turn Twist Lock Handle (non-locking) |

Ordering Information

Example TBQCSM08-LWMS480

| TBQCS | | CAM-LOCK TYPE | | 08 | | ENCLOSURE TYPE | | VOLTAGE | |
|--------|---------------|---------------|--------|----------------|---------|----------------|----------------------------------|---------|-----------|
| SERIES | CAM-LOCK TYPE | AMPERAGE | | ENCLOSURE TYPE | | VOLTAGE | | | |
| TBQCS | STANDARD | M | Male | 08 | 800 Amp | LWMS | LARGE WALL MOUNT MILD STEEL | 208 | 208Y/120V |
| | | F | Female | | | LWSS | LARGE WALL MOUNT STAINLESS STEEL | 240 | 240/120V |
| | | | | | | | | 480 | 480Y/277V |
| | | | | | | | | 600 | 600Y/347V |

| Voltage | Ground | Neutral | L1 | L2 | L3 | # of Rows |
|----------|--------|---------|-----|-----|-----|-----------|
| 208Y/120 | GRN | WHT | BLK | RED | BLU | x2 Rows |
| 240/120 | GRN | WHT | BLK | RED | BLU | x2 Rows |
| 480Y/277 | GRN | WHT | BRN | ORG | YEL | x2 Rows |
| 600/347 | GRN | WHT | BLK | RED | BLU | x2 Rows |

POWERTRON® Tap Box Warranty and Terms and Conditions of Sale are available upon request or at www.powertronsolutions.com