Carbon Block Filters - Watts

Thick wall carbon construction for superior performance. Low cost for economy!

Top-of-the-line coconut shell carbon block filter cartridge for chlorine, taste, odor and sediment reduction.

- Competitively priced!
- Outperform GAC cartridges four ways:
  1. Superior chlorine reduction
  2. Lower pressure drop
  3. Will not channel
  4. Lower cost
- 100% Coconut shell Carbon
- >90% chlorine reduction*
- FDA grade components & materials

Recommended Flow Rate

MODEL NO.	OD	LENGTH	GPM
F109009	2.5"	9-3/4"	1
F109020	2.5"	20"	2
WCBFF975	4.5"	9-3/4"	3
WCBFF20	4.5"	20"	7

Maximum operating pressure: 125 PSIG
Operating temperature: 50° F to 125° F
10° C to 52° C
*Performance tested @ flow with 2ppm chlorine.

* Tested and verified by independent laboratory testing.

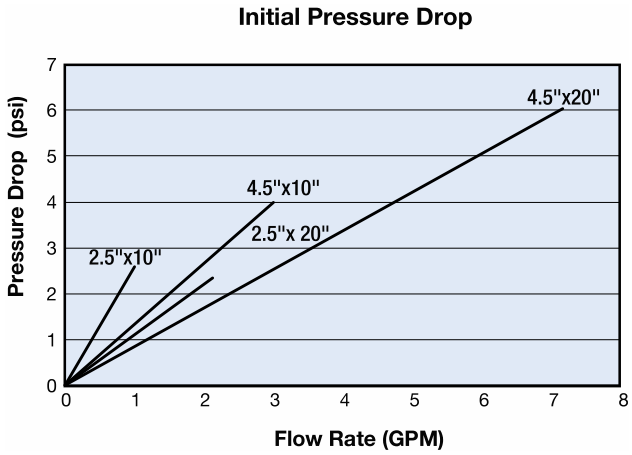

MODEL NO.	TYPE	OD	LENGTH	MICRON RATING*	CHLORINE REDUCTION*	NO. / CASE
F109009	Thick Wall	2.5"	9-3/4"	5 nominal	10,000 gal @ 1 gpm	25
F109020	Thick Wall	2.5"	20"	5 nominal	20,000 gal @ 1 gpm	25
WCBFF975	Thick Wall	4.5"	9-3/4"	5 nominal	25,000 gal @ 3 gpm	4
WCBFF20	Thick Wall	4.5"	20"	5 nominal	55,000 gal @ 7 gpm	4